



**HSU 201**  
60x60 - 24"x24"  
□ 146



**HSU 201 Rett.** □  
60x60 - 24"x24"  
□ 168




**HSU 205**  
60x60 - 24"x24"  
□ 146



**HSU 205 Rett.** □  
60x60 - 24"x24"  
□ 168



**HSU 208**  
60x60 - 24"x24"  
□ 146

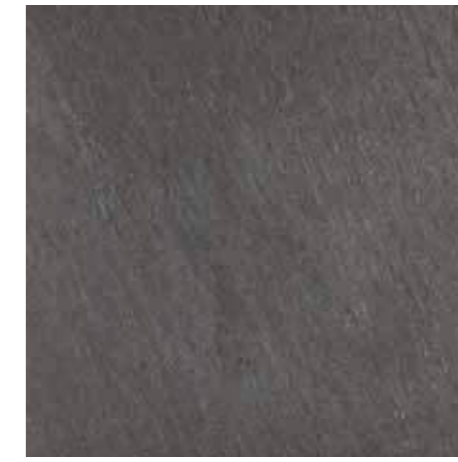

**HSU 208 Rett.** □  
60x60 - 24"x24"  
□ 168

**Pezzi Speciali** Special Pieces • Formteile • Pièces spéciales



**Gradone Lineare / HSU 201**  
60x60 24"x24"  
Step  
Stufe  
Nez de marche  
□ 109 □ 2



**Gradone Lineare Rett. / HSU 201** □  
60x60 24"x24"  
Step  
Stufe  
Nez de marche  
□ 120 □ 2



**Gradone Angolare / HSU 201**  
60x60 24"x24"  
Corner step  
Eckstufe  
Nez de marche angulaire  
□ 120 □ 2



**Gradone Angolare Rett. / HSU 201** □  
60x60 24"x24"  
Corner step  
Eckstufe  
Nez de marche angulaire  
□ 134 □ 2



**Gradone Lineare / HSU 205**  
60x60 24"x24"  
Step  
Stufe  
Nez de marche  
□ 109 □ 2



**Gradone Lineare Rett. / HSU 205** □  
60x60 24"x24"  
Step  
Stufe  
Nez de marche  
□ 120 □ 2



**Gradone Angolare / HSU 205**  
60x60 24"x24"  
Corner step  
Eckstufe  
Nez de marche angulaire  
□ 120 □ 2



**Gradone Angolare Rett. / HSU 205** □  
60x60 24"x24"  
Corner step  
Eckstufe  
Nez de marche angulaire  
□ 134 □ 2



**Gradone Lineare / HSU 208**  
60x60 24"x24"  
Step  
Stufe  
Nez de marche  
□ 109 □ 2



**Gradone Lineare Rett. / HSU 208** □  
60x60 24"x24"  
Step  
Stufe  
Nez de marche  
□ 120 □ 2



**Gradone Angolare / HSU 208**  
60x60 24"x24"  
Corner step  
Eckstufe  
Nez de marche angulaire  
□ 120 □ 2



**Gradone Angolare Rett. / HSU 208** □  
60x60 24"x24"  
Corner step  
Eckstufe  
Nez de marche angulaire  
□ 134 □ 2

	<b>Package</b>	<b>60x60</b>
	<b>Pieces</b>	2
	<b>Mq.</b>	0,72
	<b>Kg.</b>	31,80
	<b>Boxes</b>	32
	<b>Mq.</b>	23,04
	<b>Kg.</b>	1040,00

**SHADE VARIATION**

LOW	MODERATE	HIGH	RANDOM
-----	----------	------	--------

**due 2**

GRES PORCELLANATO A TUTTA MASSA	SPESSORE
THROUGH-BODY PORCELAIN TILE	THICKNESS
DURCHGEFÄRBTES FEINSTEINZEUG	STÄRKE
LE GRÈS CÉRAME PLEINE MASSE	ÉPAISSEUR

Price codes: □ Mq. □ Ml. □ Pieces



**20 mm**



**RESISTANT**  
ISO 10545.12



**~0,1%**  
ISO 10545.3



**CAMPO D'IMPIEGO CONSIGLIATO**  
RECOMMENDED USE  
ANWENDUNGSBEREICH  
PIECE D'EMPLOI CONSEILLÉE



**RESISTENZA CHIMICA**  
CHEMICAL RESISTANCE  
BESTÄNDIGKEIT GEGEN CHEMIKALIEN  
RESISTANCE CHIMIQUE



**RESISTENZA ALLA FLESSIONE**  
BENDING STRENGTH  
BIEGEFESTIGKEIT  
RESISTANCE AU POINÇONNEMENT STATIQUE



**CARICO DI ROTTURA MEDIO**  
BREAKAGE LOAD  
BRÜCHLAST  
CHARGE DE RUPTURE



**RESISTENZA MECCANICA**  
MECHANICAL STRENGTH  
MECHANISCHE FESTIGKEIT  
CLASSE D'APPELLATION NF



**RESISTENZA ALLO SCIVOLAMENTO**  
SLIPPING RESISTANCE  
RUTSCHFESTIGKEIT  
FACTEUR DE RÉSISTANCE ANTIGLISSÉMENT

**ASCIUTTO** **BAGNATO**  
DRY WET  
TROCKEN NASS  
SEC MOUILLE

**R 12** **-**  
**>0,60** **A+B+C**  
**>0,74** **>0,60**  
**>0,74** **>0,74**

DIN 51130  
DIN 51097  
ASTM C1028: COMPLIANT  
BCRA: ECCELLENTE

**U11**  
EN 13339

**Classe 1**  
**(~7,00 kN al centro)**  
EN 12825

**~50 N/mm<sup>2</sup>**  
EN 14411 B1a

**GA**  
UNI EN ISO 10545.13  
**5**  
UNI EN ISO 10545.14

